
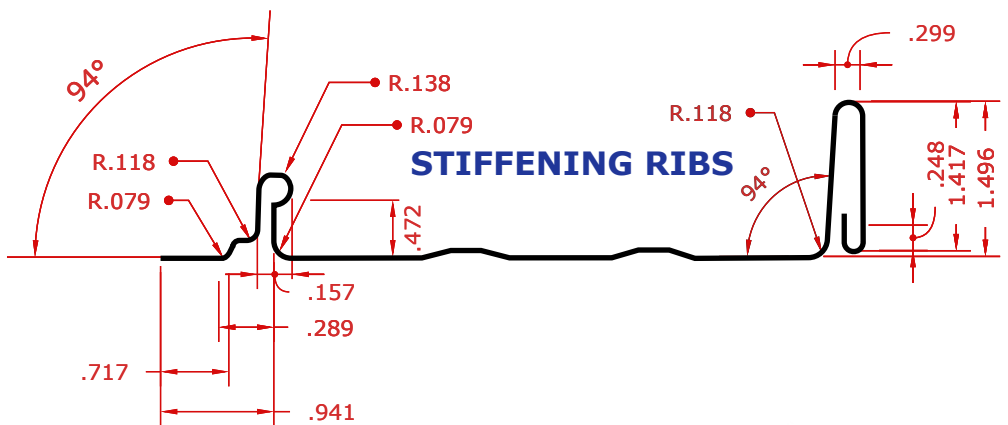


1.5" Snaplock Standing Seam

PRODUCT DESCRIPTION

1.5" Snaplock is a customizable standing seam option that has an optional factory cut pre-notch for ease of installation and consistency on eave ends of a roof. The profile maintains a high rib for esthetic while the nailing flange makes it simple to screw and lay down. This profile is best suited for a solid substrate with a pitch no less than 3/12, and can also be a suitable introduction to standing seam.

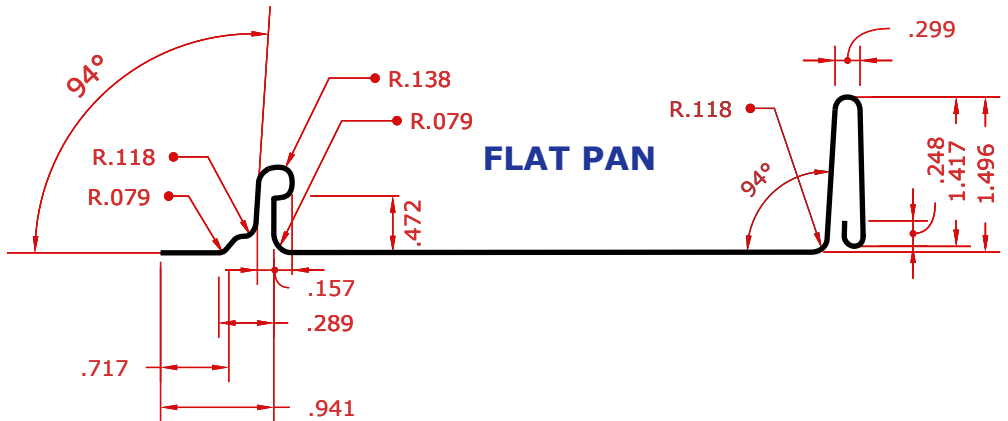

Profile Detail

Fastening System	Concealed Fastener
Application	Roofing & Siding
Panel Coverage	10.75" - 14.75"
Rib Height	1.5" (25.4mm)
Minimum Slope	3/12
Max Shipping Length	42'

Available Gauges

Galvalume	Grade 33	26ga, 24ga
Aluminum		0.040

Additional offerings may be available upon customer request. Standard production lead times are 2-4 weeks. All panels assumed 10.75" with stiffening ribs unless told otherwise.

