


# 1" Flush Wall Panel / Soffit Panel

## PRODUCT DESCRIPTION

This concealed fastener system is used for siding & soffit, in both vertical, horizontal, or angled applications. This panel has a coverage of 8"-12" and comes in 22, 24 and 26 gauge. This profile while stunning in both soffit and wall applications, has an added optional feature of being vented or "perforated" to allow for venting at the eaves.

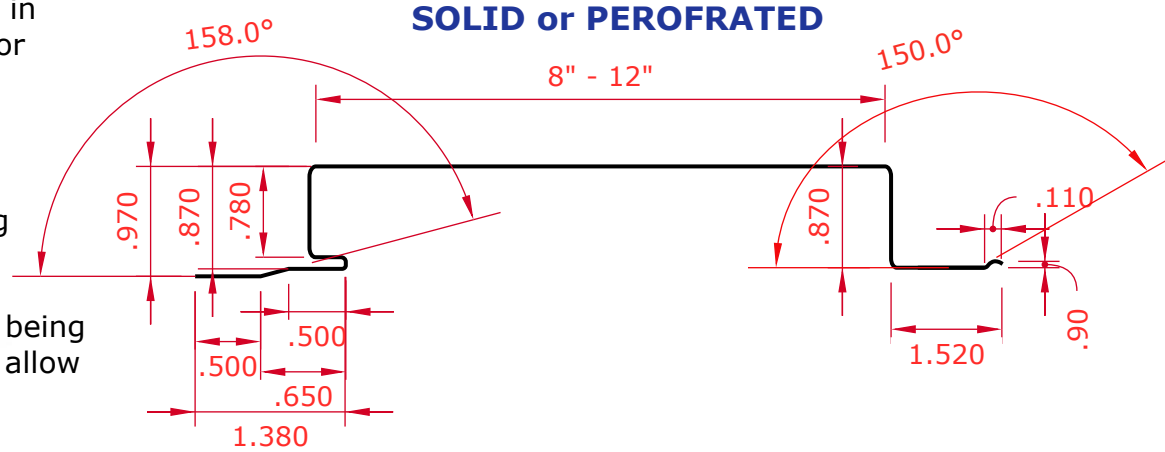

## Reveal Options

12" Panel	3/16" - 1"
8" Panel	3/16" - 1"

If not otherwise stated, all reveals are assumed 3/8".

## Profile Detail

Fastening System	Concealed Fastener
Application	Siding
Panel Coverage	8" - 12"
Rib Height	1." (25.4mm)
Minimum Slope	N/A
Max Shipping Length	42'

## Available Gauges

Galvalume	Grade 33	26ga, 24ga
Aluminum		0.040

Additional offerings may be available upon customer request. Standard production lead times are 2-4 weeks.

